

Online Research @ Cardiff

This is an Open Access document downloaded from ORCA, Cardiff University's institutional repository: <http://orca.cf.ac.uk/110256/>

This is the author's version of a work that was submitted to / accepted for publication.

Citation for final published version:

Lynch, K., Sivakumar, V., Tripathy, S. and Hughes, D. 2019. Development of a laboratory technique for obtaining soil water retention curves under external loading in conjunction with high capacity tensiometers. *Géotechnique* 69 (4) , pp. 320-328. 10.1680/jgeot.17.P.176 file

Publishers page: <https://doi.org/10.1680/jgeot.17.P.176> <<https://doi.org/10.1680/jgeot.17.P.176>>

Please note:

Changes made as a result of publishing processes such as copy-editing, formatting and page numbers may not be reflected in this version. For the definitive version of this publication, please refer to the published source. You are advised to consult the publisher's version if you wish to cite this paper.

This version is being made available in accordance with publisher policies. See <http://orca.cf.ac.uk/policies.html> for usage policies. Copyright and moral rights for publications made available in ORCA are retained by the copyright holders.



Development of a laboratory technique for obtaining Soil Water Retention Curves under external loading in conjunction with high capacity tensiometers

Authors

K. Lynch, Principal Geotechnical Engineer, Central Procurement Directorate, Department of Finance,
Northern Ireland

V. Sivakumar, Reader in Geotechnical Engineering, Queen's University Belfast

S. Tripathy, Reader in Geotechnical engineering, Cardiff University

D. Hughes, Senior Lecturer, Geotechnical Engineering, Queen's University Belfast

Corresponding author:

V Sivakumar

School of Natural and Built Environment

Queen's University Belfast

BT7 1NN

v.sivakumar@qub.ac.uk

Development of a laboratory technique for obtaining Soil Water Retention Curves under external
loading in conjunction with high capacity tensiometers

K. Lynch, V. Sivakumar, S Tripathy, and D. Hughes

ABSTRACT

This article reports the development of a testing chamber and an improved and reliable laboratory procedure, capable of establishing Soil Water Retention Curves (SWRCs) under triaxial stress conditions. The system provides the ability to take soil samples through multiple wetting-drying cycles in conjunction with measurements of suction and volumetric variables. Four drying and wetting tests were carried out on samples of glacial till and kaolin to validate the testing chamber and the associated procedures. Significant desaturation of soil samples were limited by the measurement capacity of the tensiometers. The system sustained high values of suction for a prolonged period of testing involving sequence of drying and wetting. Suction was generated by circulating less humid air through the middle of the soil sample which in effect generated suction gradients along the radial directions. Consequently, this had some impact on the interpretation of the volumetric variables.

Key words: suction, clay, pore water pressure

INTRODUCTION

1 Climate projections estimate that the UK will experience warm and dry summers, and wet winters. The
2 effects of wetting and drying of soils and their impacts on geotechnical infrastructure were clearly
3 demonstrated during 2000/2001 when more than 100 slopes failed across the UK rail network (Turner,
4 2001). In order to ensure the resilience of geotechnical infrastructure, asset managers have turned to
5 numerical modelling to seek the ways of evaluating the effects of changing climate on slopes (O'Brien,
6 2004; Jenkins *et.al.*, 2009; Murphy *et.al.*, 2010; Briggs, 2011). Such models are dependent on the
7 reliable determination of material characteristics, particularly the "Soil Water Retention Curve (SWRC)"
8 (Fredlund, 2000). A number of methods are currently available to both directly obtain and predict the
9 SWRCs (Hilf, 1956; van Genuchten 1980; Klute 1986; Fredlund and Xing 1994; Barbour 1998;
10 Aubertin *et.al.* 2003; Tang and Cui. 2005; Fredlund 2006).

11
12
13
14
15
16
17
18 Measurement of suction and the associated volumetric strains of the soil are required for establishing
19 the SWRC. It is difficult to measure suctions greater than 100 kPa directly by using traditional water
20 filled tensiometers as the water within the tensiometers cavitates at high suctions. Recent advances in
21 high suction tensiometers have facilitated the development of an alternative and continuous
22 determination of SWRCs (Ridley and Burland, 1993; Guan and Fredlund, 1997; Cunningham, 2000;
23 Ridley *et.al.*, 2003; Take and Bolton, 2003; Boso *et.al.*, 2003; Toker *et.al.*, 2004; Lourenco *et.al.*, 2007;
24 Toll *et.al.*,2013). Cunningham (2000) and Jotisankasa *et.al.*,(2007) proposed experimental procedures
25 for controlling the suction during drying and wetting processes by circulating dry air at the base of soil
26 samples until desired suction values were achieved. Lourenco (2008) implemented the above
27 mentioned technique in a double-walled triaxial cell for measuring the volume change of soil samples.
28 In order to minimize the suction gradient the dry air was circulated via geotextile wrapped around the
29 soil sample. An inclusion of the geotextile to aid the air circulation may influence the stiffness and
30 strength of the soil including impressions on the sample surface. The work presented in this paper
31 proposes an alternative way of circulating air to generate suction in soil samples under triaxial stress
32 conditions.

EXPERIMENTAL WORK

33
34
35
36
37
38
39
40
41
42
43 The determination of a SWRC requires measurements of suction and volumetric variables during
44 drying and wetting processes. The system developed for this purpose (Fig. 1) can accommodate a soil
45 sample of diameter 100mm and a height up to 130mm. The special features of the system are: (a) two
46 high capacity tensiometers capable of measuring suction up to 1500 kPa; these were located at radial
47 distances of 15 and 35mm from the center of the pedestal, but in an opposite radial directions (Figs.
48 1b and 1c), (b) air circulating ports (5mm dia.) at the center of the pedestal and the top cap for drying
49 the soil samples and (c) two wetting ports (2mm dia.), which were located at a radial distance of 25mm
50 in opposite directions, but perpendicular to the alignment of the tensiometers (Fig.1c) facilitated
51 wetting. The tensiometers were attached to the pedestal from the base and sat flush with the pedestal
52 when fastened. Necessary valves were included on the air circulation and wetting lines to facilitate
53 either air or water circulations.

1 The investigations were carried out on two soils: glacial till and commercially available kaolin. The
2 glacial till was collected from a major road cutting adjacent to the Belfast to Dublin route at
3 Loughbrickland in Northern Ireland. The properties of the soils are shown in Table 1. The test on the
4 kaolin was carried out on a reconstituted sample, prepared at an initial water content of 90%, and
5 subsequently consolidated by applying a vertical pressure of 200 kPa in a 100 mm diameter
6 consolidation chamber. The consolidated sample was extruded and trimmed to 100 mm height for the
7 subsequent investigations. A 6 mm diameter hole was carefully formed at the center of the sample to
8 facilitate the formation of a sand column (made of uniformly graded sand passing through 600 μ m and
9 retained on 425 μ m). In case of the glacial till, the collected samples were oven-dried and
10 subsequently hand crushed and sieved through a 5 mm sieve to remove bigger particles. The relevant
11 grain size distribution parameters for the soil are listed in Table 1. Three tests were carried out on this
12 material; one test was on a reconstituted sample and the remaining two were on re-compacted
13 samples. For the reconstituted sample, slurry prepared at an initial water content of 35% was
14 consolidated at a vertical pressure of 800 kPa in a consolidation chamber. Since forming a hole in the
15 sample was difficult due to the presence of gravel, a technique was used to pre-form a hole at the
16 center of the sample along its length. A special compressible slender rod was placed at the center of
17 the consolidation chamber (Figure 2). The rod consisted of a piston of 5 mm in diameter and a cylinder
18 having 6.5mm external diameter and a spring. The fully extended length of the rod was 140mm and
19 the fully compressed length was 95mm. The mass of the slurry was pre-calculated to achieve a
20 sample length of approximately 100mm so that at no time the piston would end up losing its travel
21 length. At the end of consolidation the sample was extruded and the slender rod was removed and
22 backfilled with a sand. Since the intention of the work was to begin the drying process from a low
23 suction, the sample was then reconsolidated (i.e. allowed to swell) under an effective consolidation
24 pressure of 50 kPa in a standard triaxial cell. Upon completion of the reconsolidation, the sample was
25 removed from the cell and the sand column was flushed by applying a vacuum. The initial water
26 contents of the compacted samples were 12.0 and 13.0%. In these cases, a slender rod was located
27 at the center of the mould to pre-form the required hole in the samples.
28
29
30
31
32
33
34
35
36
37
38
39
40
41

42 The saturation of the tensiometers was carried out by adopting the procedure reported in various
43 literatures (Guan and Fredlund, 1997; Take and Bolton, 2003). The chamber (Figure 1) was filled with
44 de-aired water and pressurized to 1.9 MPa for 2 weeks. The procedure was repeated in order to
45 ensure complete saturation of the tensiometers. The sample was subsequently located on the
46 pedestal of the chamber, while making sure that the hole in the sample aligned itself with the air
47 circulating port on the pedestal. The hole in the sample was filled with sand. The top cap was carefully
48 positioned and a membrane was placed around the sample and sealed using "O" rings. The chamber
49 was assembled and filled with de-aired water. A confining pressure of 50 kPa was applied and the flow
50 of water into the chamber was detected using a volume change unit (Fig. 1).
51
52
53
54
55
56

57 The drying process commenced by circulating air through the sand column in the sample. The water
58 permeability of the sand reduces rapidly under high suction. However it has no impact on the air
59
60
61
62
63
64
65

1 permeability of the sand as extraction of water from the clay takes place in vapour form. This air was
2 circulated in a closed-loop via another chamber which contained saturated sodium chloride solution.
3 The air circulating port at the bottom of the testing chamber was connected to the top of the salt
4 solution chamber. The air circulating port at the top of the sample which carried the flushed air was left
5 immersed in the saturated salt solution. A 3.0V pump, with a line pressure of 5 kPa facilitated the
6 circulation of air.
7
8
9

10 The salt chamber was placed on a scale that measured the mass of the chamber to an accuracy of
11 0.01g. The mass of the salt chamber was recorded manually 1-2 times per day. During the process,
12 the connecting tubes to the test chamber were disconnected. After the drying process, the sample
13 underwent a wetting process. The air circulation ports were closed and the water injection ports were
14 opened and connected to a pressure-volume controller. During the wetting process, water was
15 injected into the sample at a rate of 0.003 cm³/min. This rate was approximately the same as the rate
16 of water extraction from the sample during the drying process. Table 2 lists the testing conditions and
17 the associated wetting and drying paths of the samples tested. Upon completion of a test, the drying-
18 wetting chamber was dismantled and the final volume of the sample was measured by weighing the
19 sample in air and water. Oldecop and Alonso, 2004 reported up to about 20% error in the water
20 between the measured water content and calculated water content using test records. However the
21 present investigation showed a significantly reduced error, a maximum of 3% in a test that involved
22 many number of drying and wetting cycles, Table 3. In addition to the tests described above, further
23 tests were carried out on reconstituted samples of glacial till and kaolin prepared in the same fashion
24 as described above. Which were subjected to physical loading in order to establish the pressure-
25 volume relationships in a standard triaxial cell.
26
27
28
29
30
31
32
33
34
35

36 **RESULTS AND DISCUSSION**

37 **Experimental observations**

38 Figure 3 shows the relative humidity of the air entering and leaving the sand column located in case of
39 a kaolin sample. These measurements were made externally to the chamber at the point of entry and
40 exit, over a period of 4 weeks. The relative humidities of the air entering and leaving the sand column
41 are approximately 75% and 90%, equating suction values of 38MPa and 14MPa respectively. These
42 observations clearly demonstrate a suction gradient along the length of the sand column, which may
43 have some impact on the interpretation of the results which will be discussed later. The sand column
44 in the sample acts as a well, drawing water from the soil sample in all radial directions. This again
45 consequently generates a suction gradient along the radial directions. In the present investigation,
46 drying was done continually (and that for wetting) and therefore the suction values recorded are based
47 on the transient measurements. This may mean that, for example during the drying process, the clay
48 away from the sand column may be wetter than the clay close to the sand column. A uniform suction
49 can be achieved by periodically stopping the pump until a steady state is reached. However it may
50 have some impact on the stress history of the clay close to the sand column (higher suction) which
51 would draw water from the clay away from the column (lower suction) and therefore, the clay close to
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 the sand column becomes overconsolidated. Nevertheless this aspect was partially examined in the
 2 test carried out on the kaolin. The air circulating valve was closed twice at low suction values (Fig. 4a)
 3 and once at a high suction value (Fig. 4b). In this test, the suction probe 2 failed to function. As it can
 4 be seen the suspension of the air circulation lead to about a reduction in suction of about 10% and it
 5 appeared to have stabilized during the resting period. This reduction in suction is considered to be not
 6 significant and would not impact the analysis presented later in this paper. Therefore it was decided
 7 not to terminate the air circulation during the tests.
 8
 9

10
 11 Figures 5 to 7 show the suctions and the volumetric responses of the glacial till samples G1, G2, and
 12 G3 (Table 2) during the course of the drying process. Tensiometer 1 is closer to the sand column and
 13 tensiometer 2 is further away from the sand column. As to the reconstituted glacial till sample (G1) the
 14 difference between the suction values read by tensiometers 1 and 2 is approximately 50 kPa at a
 15 given time. For the recompacted samples (G2 and G3) the differences are as low as 20 kPa. The
 16 differences in the suction could be higher at any other locations closer the sand column. The reduced
 17 difference between the suction values in case of recompacted samples may have been due to high
 18 permeability of recompacted samples associated with the bimodal pore size distribution as opposed to
 19 the reconstituted sample. The increasing suction in all three samples has resulted in significant
 20 amount of volume changes in terms of the overall voids as well as the voids filled with water. The
 21 agreement between the volumetric strains and the water volumetric strains is reasonably good up to
 22 about a suction value of 300 kPa and begin to diverge as suction increased further implying that air
 23 entered into the reconstituted sample (G1). However the disparity between the volumetric and water
 24 volumetric strains is quite apparent from the very beginning of the drying in G2 and G3 implying that
 25 the desaturation may have started at low suctions which is plausible given the fact that these samples
 26 inherited bimodal pore size distribution.
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37

38 Discussion

39 Figures 8, 9 and 10 show the volumetric responses and the degree of saturation plotted against $(p+s)$
 40 for the glacial till samples, where p is the net mean stress and s is the suction. As shown in these
 41 figures the degree of saturation of the samples achieved was about 88%. Any further reduction of it
 42 was limited by the maximum suction that can be sustained by the tensiometers (1500 kPa). Therefore,
 43 the interpretation is based on a simplified approach using the stress term, $(p+s)$. As a part of the
 44 discussion, the compressibilities of the samples during drying and wetting were also evaluated using
 45 the parameters defined as follows: λ_s = the slope of the virgin drying line with respect to the void ratio
 46 (also referred to as the environmental loading), λ = the slope of the compression line under external
 47 loading (also referred to as the physical loading), λ_{ws} = the slope of the virgin drying line with respect
 48 to the water void ratio, κ_s = the slope of the wetting line with respect to the void ratio and κ_{ws} = the
 49 slope of the wetting line with respect to the water void ratio.
 50
 51
 52
 53
 54
 55
 56
 57

58 In the testing of the reconstituted sample of the Glacial till (G1, Fig.8), the tensiometers failed to
 59 function at the end of the first drying process and therefore no wetting process was initiated. The key
 60
 61
 62
 63
 64
 65

1 observations from this test are: (a) a marginal de-saturation process began at a suction value of about
 2 30 kPa, Fig. 8b; however, a more pronounced de-saturation process begun at a suction of about 800
 3 kPa which agrees well with the stress history of the sample and the sample may not have possessed
 4 any bi-modal pore size distribution. As the suction increased further, emptying of the water continued
 5 to take place; however, the associated reduction in the void ratio slowly reduced as one would expect
 6 when the soil sample begins to de-saturate more intensively. The approximate value of the yield stress
 7 is about 550 kPa which is reasonably close to the average mean effective stress that the sample might
 8 have experienced during its initial formation in one dimensional consolidation chamber and assuming
 9 the angle of internal friction of glacial till = 32°. The relevant slopes identified as above (λ_s and λ_{ws}) are
 10 approximately 0.05. However, λ_{ws} rapidly increased while λ_s fell significantly when the desaturation
 11 process became more pronounced. The volume-pressure characteristics under physical loading (G1A,
 12 Table 2) are indicated using open circular data points in Figure 8a. The value of λ and the position of
 13 the compression line under this loading condition is reasonably similar to that of environmental
 14 loading.
 15
 16
 17
 18
 19
 20
 21
 22

23 The glacial till sample (G2) was first dried (D) and then wetted (W) and dried (D) again (Fig. 9),
 24 whereas the sample G3 was subjected to D-W-D-W-D processes (Fig. 10), Table 2. The samples
 25 were dried up to a suction of 1400 kPa and wetted to a suction of about 60 kPa in each case. Both
 26 samples have shown some significant desaturation at very low suction values. This observation could
 27 be interpreted as air entering into the macrovoids. A more prominent de-saturation begun at suction
 28 values of about 650 kPa for G2 and 500 kPa for G3, as opposed to 750 kPa for G1. The differences in
 29 the suction at the point of pronounced de-saturation is not insignificant to ignore and can be primarily
 30 attributed to the structure within the aggregates in G2 and G3. An increasing in the compaction water
 31 content can lead to increased microvoids (Thom *et.al.* 2007; Delage *et.al.*, 1996) and compaction
 32 process can also inflict micro-fractures at aggregate level (Sivakumar *et.al.* 2010).
 33
 34
 35
 36
 37
 38
 39

40 The slopes of the first drying line, λ_s , for samples G2 and G3 are similar (0.04). This value is slightly
 41 lower than that observed in case of sample T1. As one would expect, the value of λ_{ws} is slightly higher
 42 than λ_s (0.05) for samples G2 and G3. The approximate values of the yield stress for samples G2 and
 43 G3 are 250kPa and 400kPa respectively. The samples G2 and G3 were expected to exhibit yielding
 44 during re-drying at 1400 kPa (the maximum suction they ever experienced); however, observations
 45 from G2 indicate that it yielded at a slightly lower value of suction. This could have been due to the
 46 localized softening at aggregate level (Wheeler *at al.* 2003; Alonso *et al.* 1995). Also it is interesting to
 47 note that the hysteresis caused by the drying and wetting cycles is more pronounced in the water
 48 phase than in the volumetric phase as the emptying and filling mechanisms upon increasing and
 49 reducing suction are different (Wheeler *at al.* 2003). The slopes of wetting and drying lines on
 50 volumetric and water volumetric phases (κ_s , κ_{ws}) are different and approximate values are 0.01. The
 51 slopes of the wetting and re-drying lines are quite different, but such responses are commonly
 52 observed under physical unloading and reloading of saturated soils.
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65

Figure 11 shows the relationship between the void ratios (e and e_w) and the logarithm of $(p+s)$ for the reconstituted kaolin K1. It appears that the sample may have begun to de-saturate marginally at a suction value of around 550 kPa; however, the reduction in the degree of saturation beyond this suction value is not rapid. As it can be seen the wetting and subsequent drying paths are (Figure 10a) very much identical in terms of both volumetric variables, except the fact that the wetting and re-drying paths are not identical. This was also observed in the case of the glacial till samples. The sample of kaolin was subjected to a vertical pressure of 200 kPa in the consolidation chamber prior to testing in the drying-wetting chamber (Table 2). Therefore the approximate value of the mean effective stress that the sample may have experienced would be around 145 kPa (the angle of internal friction 22°). The approximate value of $(p+s)$ at the point of yielding is about 350 kPa (Fig. 11a) and this value is higher than the expected yield stress. The values of λ_s and λ_{ws} are similar (0.15). The observations from the additional test, carried out on a kaolin sample (K1A, Table 2) to examine the pressure-void ratio relationship under physical loading, are shown using open circular data points in Fig. 11a. The approximate value of λ is 0.15 and it is in close agreement with the value for λ_s . The drying and wetting processes are associated with increasing or reducing suction (or reducing or increasing the pore water pressure) and they are analogous to increasing or reducing external pressures. While the compression indices λ and λ_s are in agreement, the positions of the normal compression lines under these two loading conditions are found to be distinctively dissimilar. This observation questions the similarities of the two different loadings. The maximum suction that the sample experienced during the first drying process was 1400 kPa. There is no significant evidence to suggest that the sample begins to yield upon second drying until the maximum suction value that was achieved during the first drying process. The approximate values of κ_s and κ_{ws} are similar (0.04).

There are some interesting observations that have emerged from the testing of the reconstituted samples of kaolin and glacial till. The most puzzling observation is the difference between the positions of the normal compression line which emerged from the physical loading and the virgin drying line of kaolin which emerged from the environmental loading. The following are plausible reasons for the observed behaviours:

- (a) The suction was measured at the base of the samples at two locations (Figure 1). Due to technical difficulties (in test K1) the tensiometer 2 (35 mm away from the center of the sample) failed to work and therefore the interpretation was carried out based on the suction measurement obtained from tensiometer 1. The earlier section has highlighted the potential suction gradients along the length of the sample and in radial directions. This therefore may have resulted in overestimating the average suction contributed to the disparity in the position of the normal compression line and the virgin drying line. However such overestimation of suction may not be significant as per the observations presented in Figure 4 which clearly highlighted a potential reduction of suction of only about 10% (this reduction in suction during the resting period is not shown in Figure 11). This reduction in suction is not sufficient enough to bring the position of the normal compression line obtained from the environmental loading close to that of the physical loading. In addition, the

overestimated suction value cannot be considered as the prime reason for the disparity between the two normal compression lines, as the sample of glacial till, where the differences in the suction values measured by tensiometers 1 and 2 are as low as 50 kPa in Test G1 (Fig. 5). The permeability of kaolin is considerably higher than that of the glacial till. Therefore any differences in the suction values would have been less in the case of kaolin.

- (b) The volume change behaviour of clays is governed by the physico-chemical forces within the clay-water-ion systems. The magnitudes of attractive forces arising from the van der Waals and Coulombic attraction and the repulsive force stemming from the electrical double layer interaction between clay particles depend upon the specific surface area, the pore fluid characteristics and the properties of the fluid in contact with the clay (dielectric constant, concentration and pH). In the absence of an appreciable repulsive force, the factors determining the volume change behaviour of kaolinite are (Sridharan and Rao, 1973): (i) the frictional resistance, (ii) the fabric of the clay and (iii) the attractive forces. The distance between clay particles and hence the void ratio of kaolinite is affected by the attraction forces, the magnitudes of which are influenced by the dielectric constant of the interacting fluid. The attractive forces vary inversely with the dielectric constant of the pore fluid (80.4 for water and 1.0 for air). Additionally, in the presence of water phase continuity between the pore fluid and the interacting fluid, an expulsion of ions from the clay media occurs (Bolt, 1956; Tripathy *et.al.*, 2014) and that leads to a decrease in the thickness of the electrical double layer and an increase in the dielectric constant of the pore fluid leading to a greater compression of saturated clay. In the current case, the chemical composition of the clay remains unchanged during the drying process as the drainage of water takes place in the vapor form. This therefore implies that a higher void ratio attained by the kaolinite sample under suction loading is primarily due to the removal of water in the vapor form than that of the sample under mechanical loading of the same magnitude, resulting in the drainage of the pore fluid in the liquid form. The physico-chemical forces in the case of glacial till is not of paramount of importance since the percentage of the fine fractions is less than 16%.

CONCLUSIONS

A novel system was developed for establishing SWRCs under triaxial stress conditions. Compacted and reconstituted samples of two soils were subjected to cycles of drying and wetting spanning over several weeks during which the tensiometers functioned satisfactorily. Continuous drying was achieved by circulating air through the centre of the soil samples, whereas wetting occurred by injecting water into the samples in a controlled fashion. The agreements between the volumetric variables (e and e_w) are found to be excellent until the point of desaturation indicating that the system functioned effectively. The method of drying by circulating air through the middle of the soil samples generated suction gradient along the radial directions which had some impact on the interpretation of the volumetric variables. The disagreement between physical and environmental loadings is attributed primarily to the depletion of ions during the drainage under physical loading specifically for clay-rich soils such as kaolin in the present study.

ACKNOWLEDGMENT

The authors also wish to thank Mr Deacy, P J Carey Ltd, UK and VJ Tech Ltd, UK for continuing their support for the geotechnical engineering research at Queens' University Belfast.

REFERENCES

- Alonso, E.E., Lloret, A., Gens, A. and Yang, D.Q. (1995). Experimental behavior of highly expansive double structure clay. Proceedings of the first internal conference on unsaturated soils, France, 6-8 September 1995.
- Aubertin, M., Mbonimpa, M., Bussiere, B. and Chapuis, R. P. (2003). A model to predict the water retention curve from basic geotechnical properties. *Canadian Geotechnical Journal*, 40(3): 1104–1122.
- Barbour, S.L. (1998). Nineteenth Canadian Geotechnical Colloquium: The soil water characteristic curve: a historical perspective. *Canadian Geotechnical Journal*, 35(5): 873–894.
- Bolt, G. H. (1956). Physico-chemical analysis of the compressibility of pure clays. *Geotechnique*, 6(2): 86-93.
- Boso, M., Romero, E. and Tarantino, A. (2003). The use of different suction measurement techniques to determine water retention curves, *Unsaturated soils: Experimental studies*, (ed. Schanz T), Berlin, Springer-Verlag: 171-181.
- Briggs, K. M. (2011). Impacts of climate and vegetation on railway embankment hydrology. EngD. Thesis. University of Southampton, UK.
- Cunningham, M.R. (2000). The mechanical behaviour of a reconstituted unsaturated soil, Ph.D. Thesis, Imperial College of Science, Technology and Medicine, London.
- Delage, P., Audiguier, M., Cui, Y.J. and Howat, M.D. (1996). Microstructure of a compacted silt. *Canadian Geotechnical Journal*, 33(1): 150-158.
- Fredlund, D.G. (2000). The 1999 R.M. Hardy lecture: The implementation of unsaturated soil mechanics into geotechnical engineering. *Canadian Geotechnical Journal*, 37: 963-986.
- Fredlund, D.G. (2006). Unsaturated soil mechanics in engineering practice. *Journal of Geotechnical and Geoenvironmental Engineering*, 132(3): 286–321.
- Fredlund, D. and Xing, A. (1994). Equations for the soil-water characteristic curve. *Canadian Geotechnical Journal*, 31: 521–532.
- Guan, Y. and Fredlund, D. G. (1997). Use of the tensile strength of water for the direct measurement of high soil suction. *Canadian Geotechnical Journal*, 34(2): 604-614.
- Hilf, J.W. (1956). An investigation of pore water pressure in compacted cohesive soils, United States Bureau of Reclamation, Technical Memorandum 654, Denver.
- Hughes, D.A.B., Clarke, G.R.T., Harley, R.M.G. and Barbour, S.L. (2016). The impact of hydrogeology on the instability of a road cutting through a drumlin in the North of Ireland. *Quarterly Journal of Engineering Geology and Hydrology*, 49(1): 92-104.

- Jenkins, G. J., Murphy, J. M., Sexton, D. M. H., Lowe, J. A., Jones, P. and Kilsby, C. G. (2009). UK Climate Projections: Briefing report. Met Office Hadley Centre, Exeter, UK.
- Jotisankasa, A., Coop, M. and Ridley, A. (2007). The development of a suction control system for a triaxial apparatus. *Journal of Geotechnical Testing*, 30(1): 69-75.
- Klute, A. (Editor). (1986). Water retention: laboratory methods. In *methods of soil analysis*. Number 9, Part1: Agronomy. American Society of Agronomy and Soil Science Society of America, Madison, Wisconsin: 635–662.
- Lourenço, S.D.N. (2008). Suction Measurements and Water Retention in Unsaturated Soils, PhD thesis, Durham University.
- Lourenço, S.D.N., Gallipoli, D., Toll, D., Evans, F. and Medero, G. (2007). Determination of the Soil Water Retention Curve with tensiometers, *Experimental unsaturated soil mechanics*, (ed. Schanz T), Berlin, Springer-Verlag, 95-102.
- Murphy, J., Sexton, D., Jenkins, G., Boorman, P., Booth, B., Brown, K., Clark, R., Collins, M., Harris and G., Kendon, E. (2010). UK Climate Projections science report: Climate change projections: Summary. Met Office Hadley Centre: 8-11.
- O'Brien, A.S., Ellis, E.A. and Russell, D. (2004). Old railway embankment clay fill - laboratory experiments, numerical modelling and field behavior. *Advances in Geotechnical Engineering: The Skempton Conference, March 29-31 2004*, Thomas Telford Services Ltd: 911-921.
- Oldecop, L. and Alonso, E.E. (2004). Testing rockfill under relative humidity control. *Geotechnical Testing Journal*. 27(3), pp 1-10.
- Ridley, A.M. and Burland, J.B. (1993). A new instrument for the measurement of soil moisture suction. *Geotechnique*, 43(2): 321-324.
- Ridley, A.M., Dineen, K., Burland, J.B. and Vaughan P.R. (2003). Soil matrix suction: some examples of its measurement and application in geotechnical engineering. *Geotechnique*, 53(2): 241-253
- Sridharan, A. and Rao, G.V. (1973). Mechanisms controlling volume change of saturated clays and the role of effective stress concept. *Geotechnique*, 23(3): 359-382.
- Sivakumar, V., Sivakumar, R., Murray, E.J., Mackinnon, P. and Boyd, J. (2010). "Mechanical Behaviour of Unsaturated Kaolin: (with Isotropic and Anisotropic Stress History) Part 1: Wetting and Compression Behaviour." *Géotechnique*, Vol. 60(8), pp. 581-594.
- Take, W.A., and Bolton, M.D. (2003). Tensiometer saturation and the reliable measurement of soil suction, *Géotechnique* , 53(2): 159-172
- Take, W.A. and Bolton, M.D. (2004). Identification of seasonal slope behaviour mechanisms from centrifuge case studies. *Advances in Geotechnical Engineering: The Skempton Conference, Mar 29-31 2004*, Thomas Telford Services Ltd: 992-1004.
- Tang, A.M. and Cui, Y.J. (2005). Controlling suction by the vapour equilibrium technique at different temperatures, application in determining the water retention properties of MX80 clay. *Canadian Geotechnical Journal*, 42(1): 287-296.
- Toker, N., Germaine, J., Sjoblom, K., Culligan, P. (2004). A new technique for rapid measurement of

continuous soil moisture characteristic curves. *Geotechnique*, 54(3): 179-186

1 Toll, D.G., Lourenco, S.D.N. and Mendes, J. (2013). Advances in suction measurements using high
2 suction tensiometers. *Engineering Geology*, 165: 29-37.
3


4 Tripathy, S., Tadza, M.Y.M. and Thomas, H.R. (2014). Soil–water characteristic curves of clays.
5
6 *Canadian Geotechnical Journal*, 51(8): 869–883

7 Thom, R., Sivakumar, R., Sivakumar, V., Murray, E.J. and MacKinnon, P. (2007) “Pore size
8 distribution of unsaturated compacted kaolin: the initial states and final states following
9 saturation.” *Géotechnique*, Vol. 57(5), pp. 469-474.
10

11 Turner, S. (2001). Climate change blamed as landslip incidents treble. *New Civil Engineer*.

12 Van Genuchten, M. T. (1980). A closed-form equation for predicting the hydraulic conductivity of
13 unsaturated soils. *Soil Society of America*, 44: 892–898.
14

15 Wheeler, S.J., Sharma, R.S. and Buisson, M.S.R. (2003). Coupling of hydraulic hysteresis and stress-
16 strain behavior in unsaturated soils. *Geotechnique*, 53(1): 41-54.
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

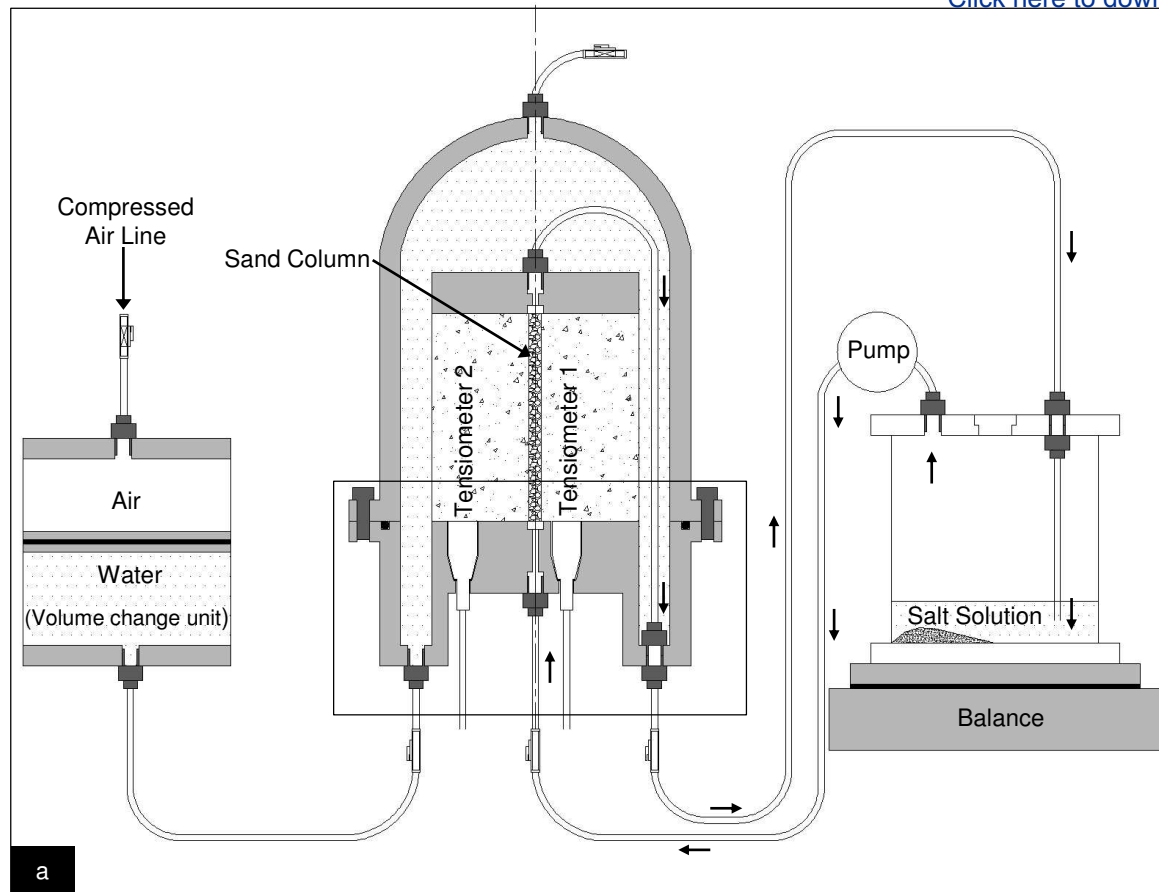

Drying Arrangement (Section A-A)

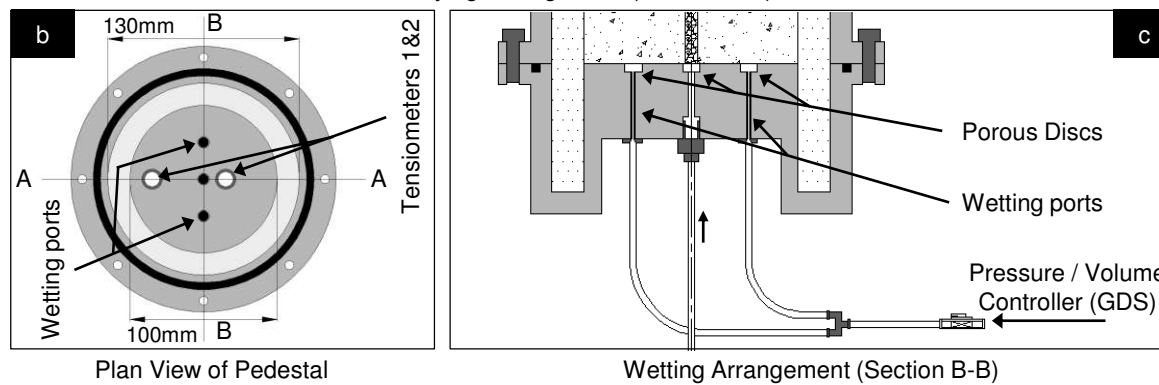


Figure 1 - Schematic of testing arrangement

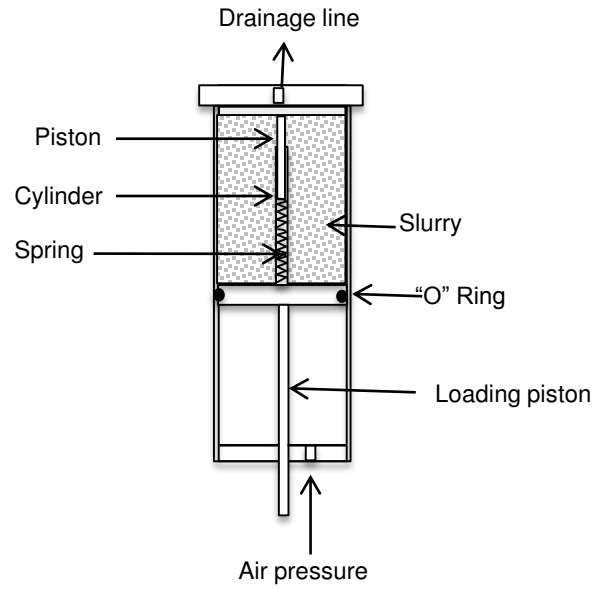


Figure 2 - Consolidation chamber



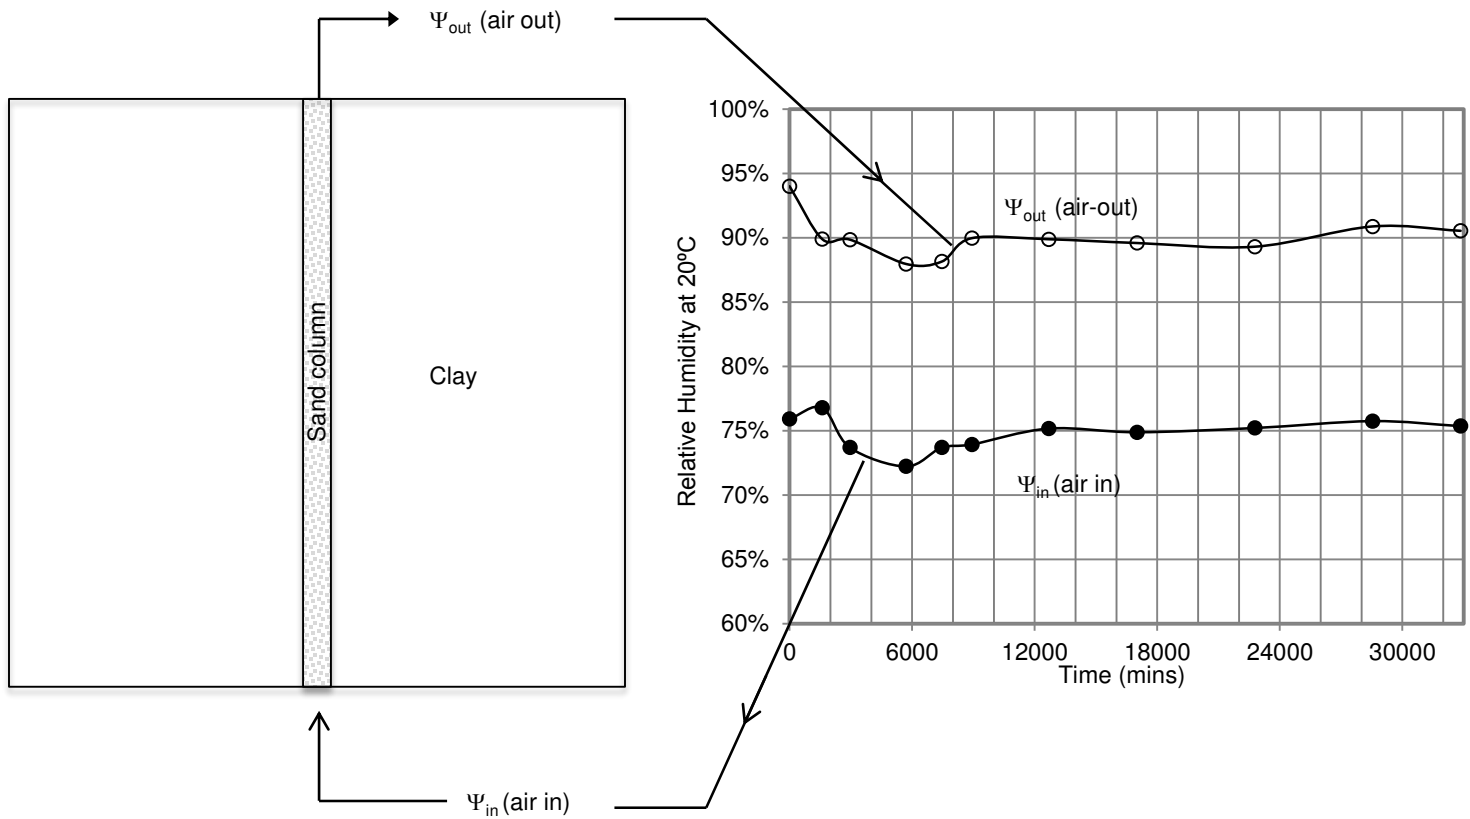


Figure 3 - Relative humidity of air entering and leaving sample

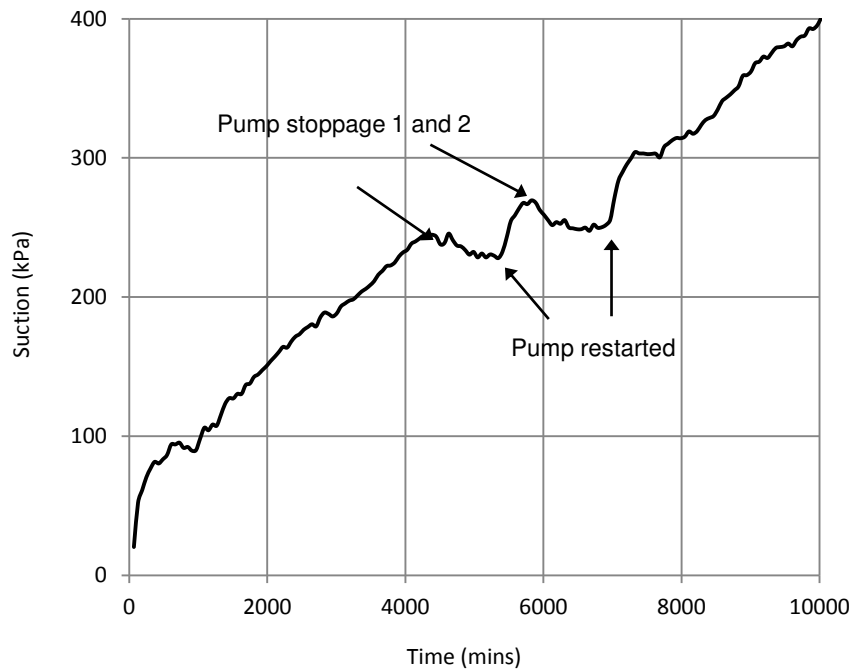

(a) Pump stopped at early stage of drying

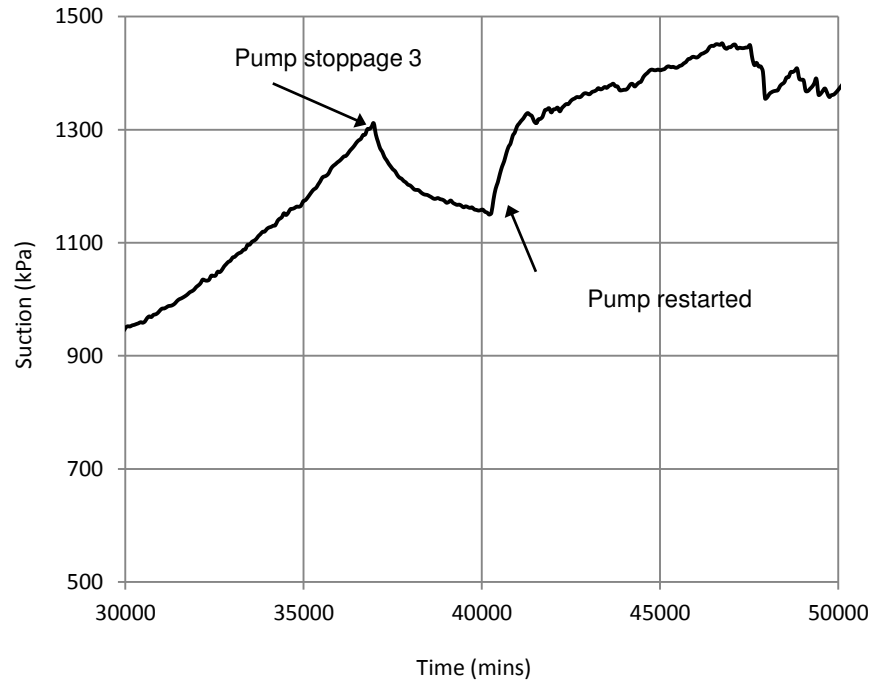

(b) Pump stopped at later stage of drying

Figure 4 – Equalization of suction during resting period

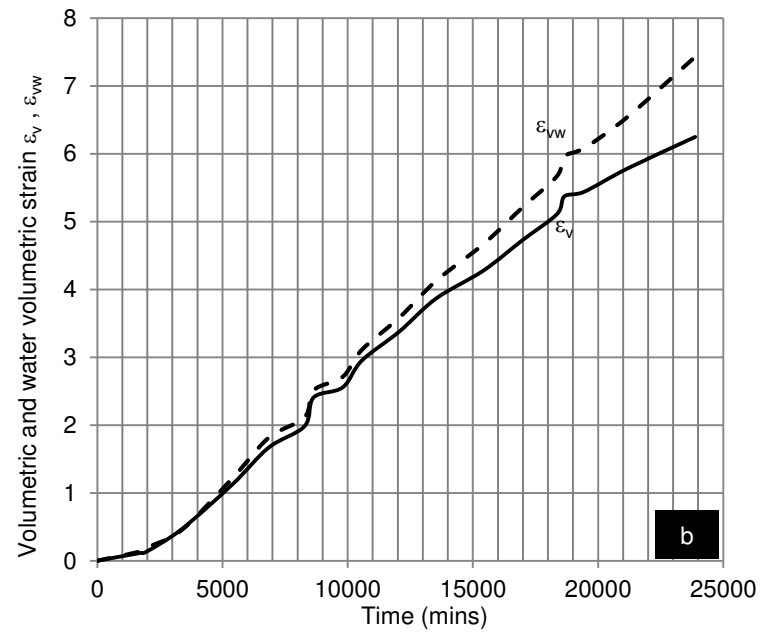
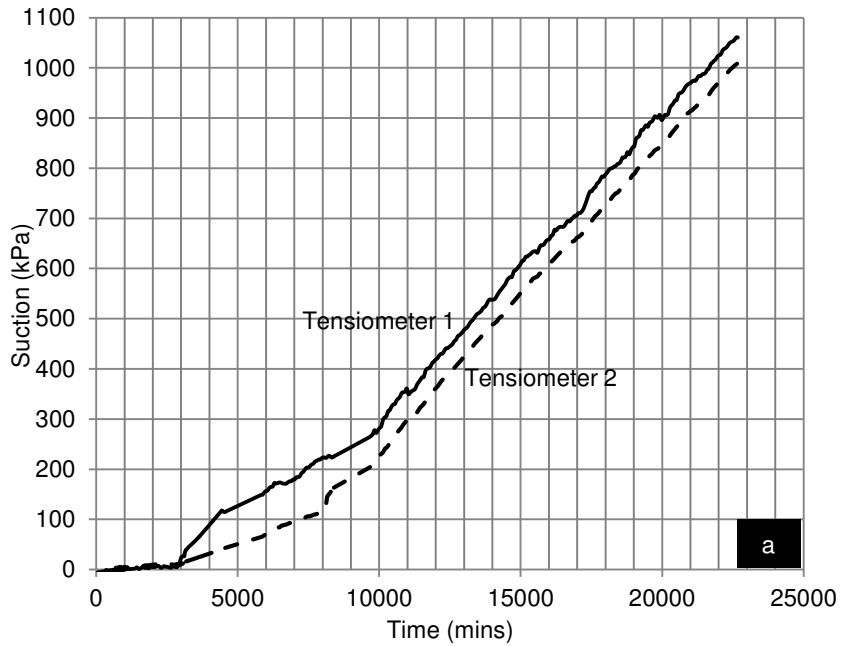


Figure 5 - Suction and volumetric strains of water and void phases with time (G1)

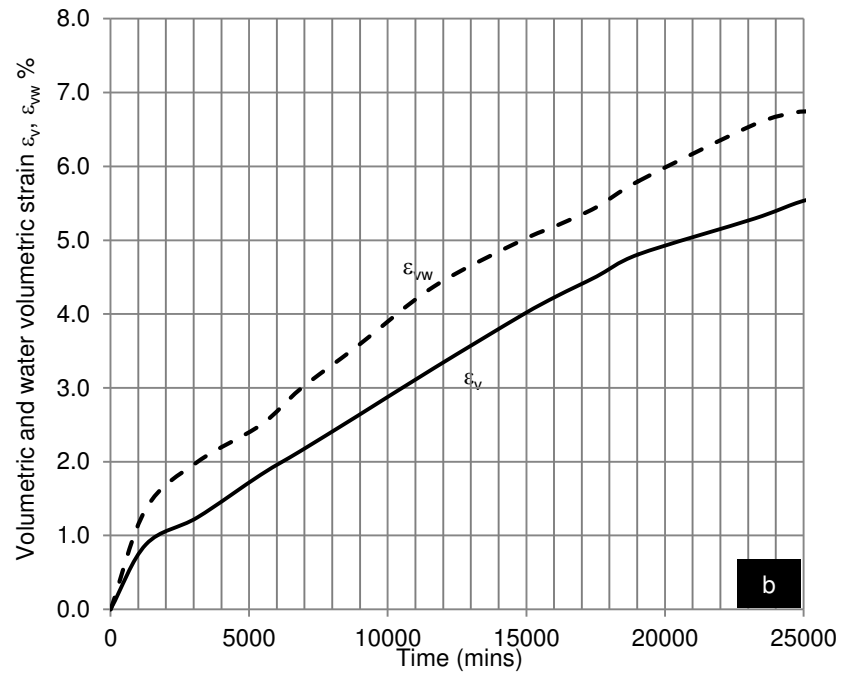
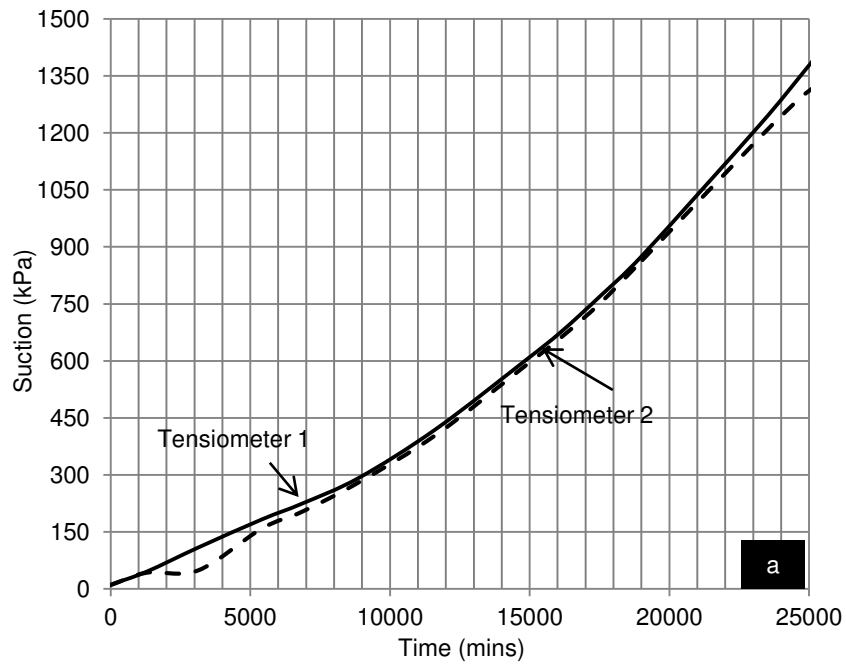


Figure 6 - Suction and volumetric strains of water and void phases with time (G2)

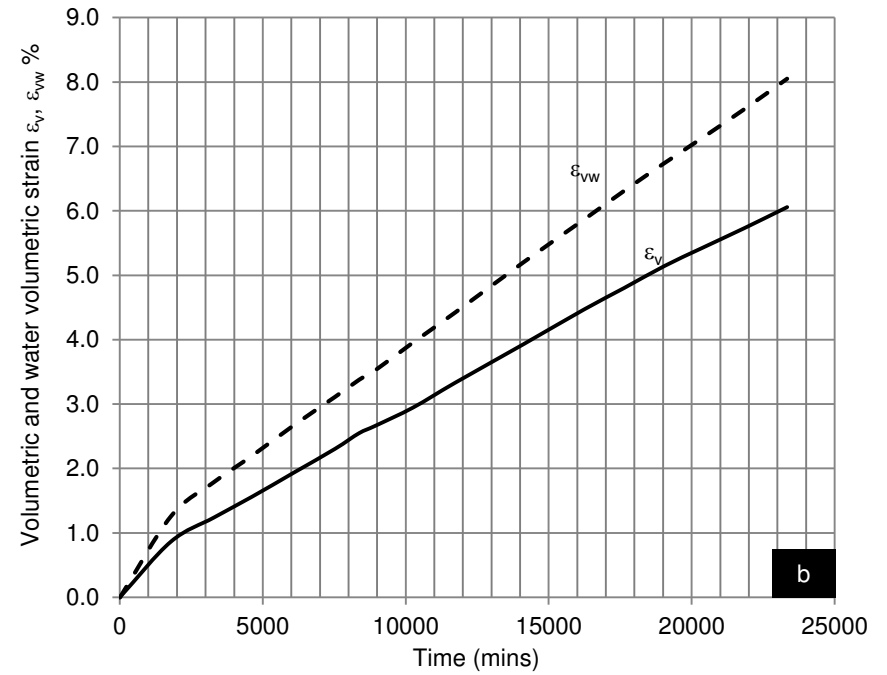
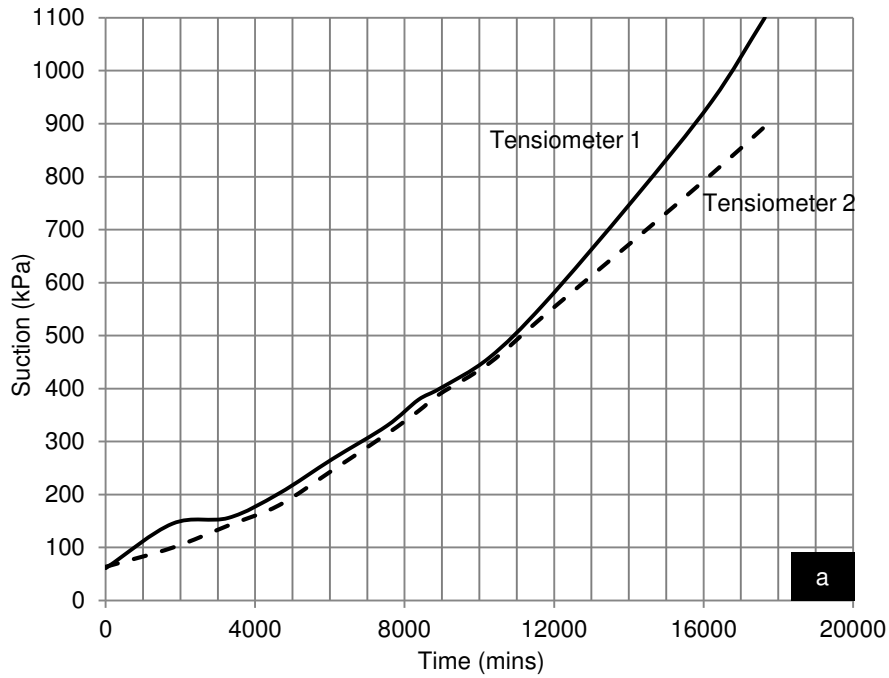


Figure 7 - Suction and volumetric strains of water and void phases with time (G3)

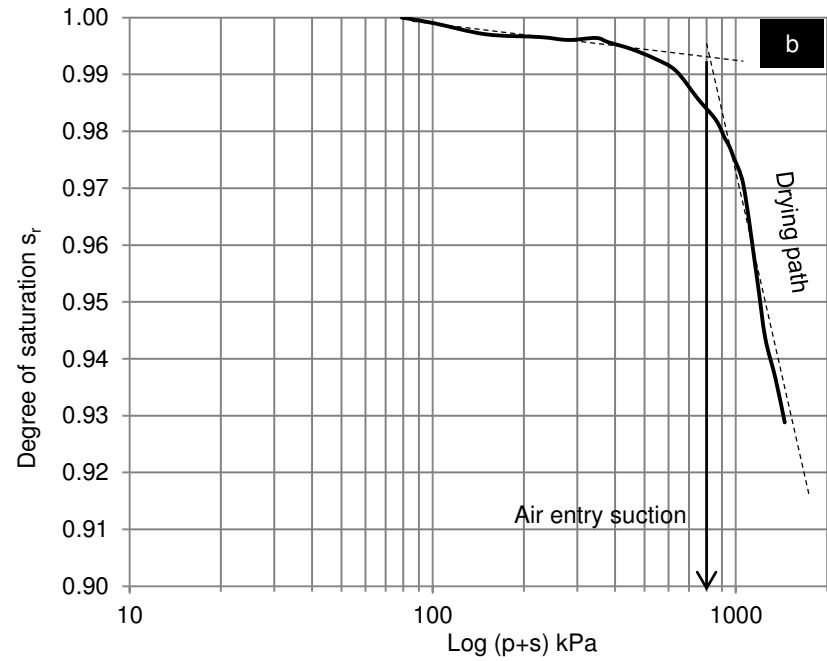
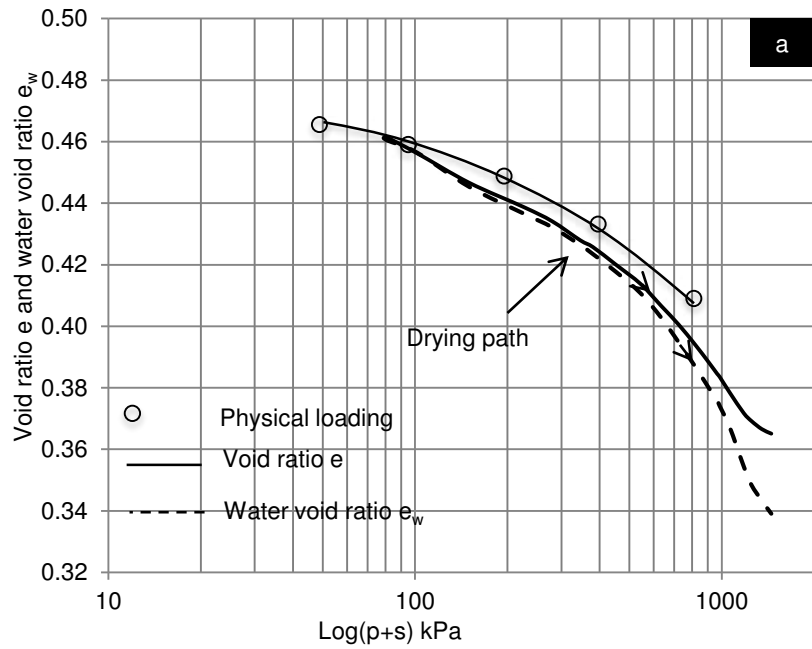


Figure 8 - Void ratio, degree of saturation vs suction for reconstituted Glacial (G1)

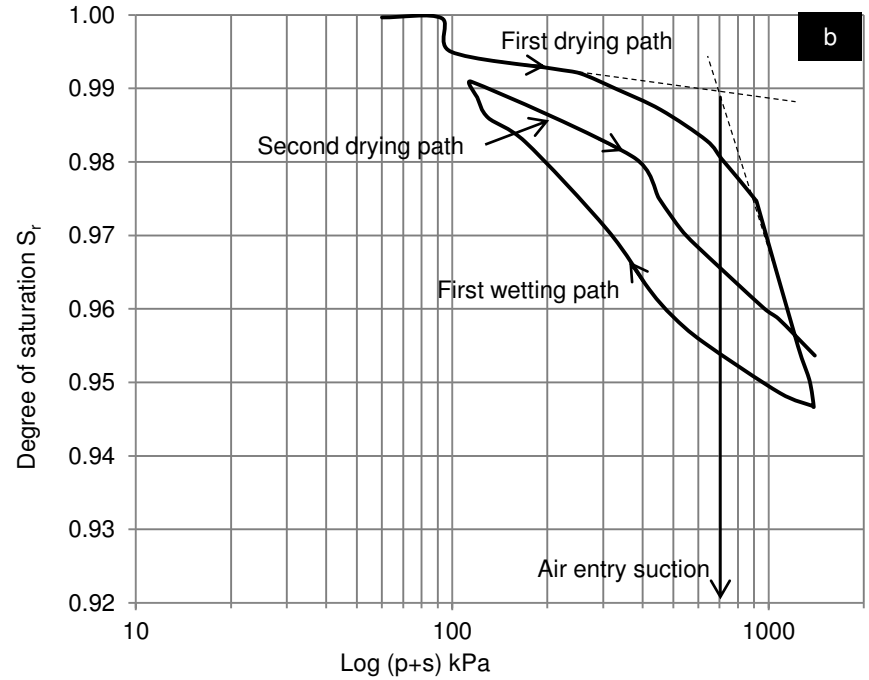
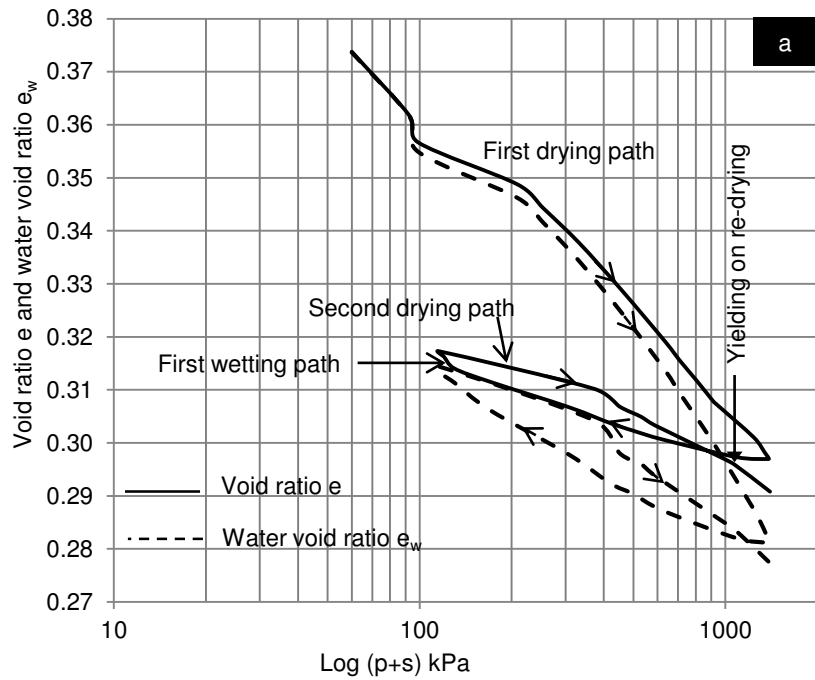


Figure 9 - Void ratio, degree of saturation vs suction for Glacial till compacted at 12% water content (G2)

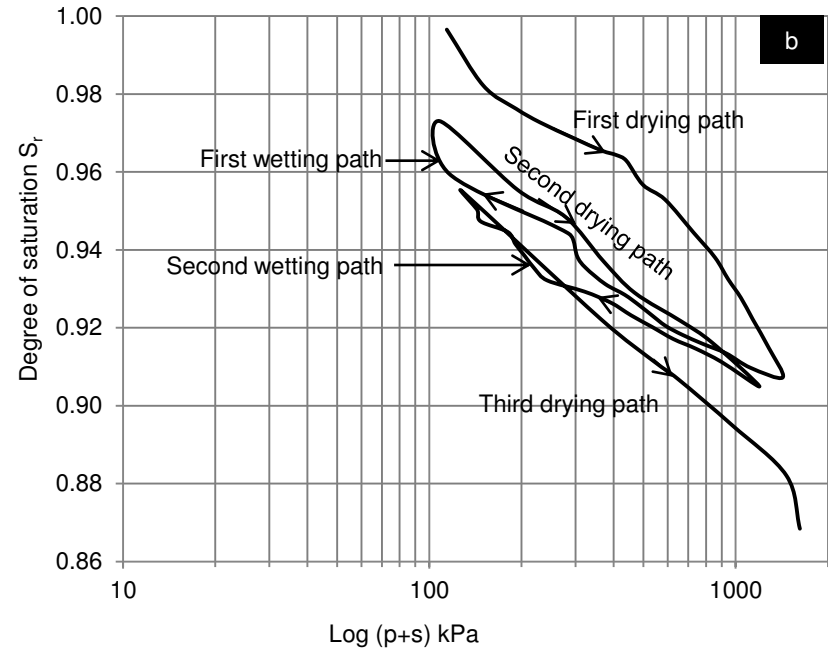
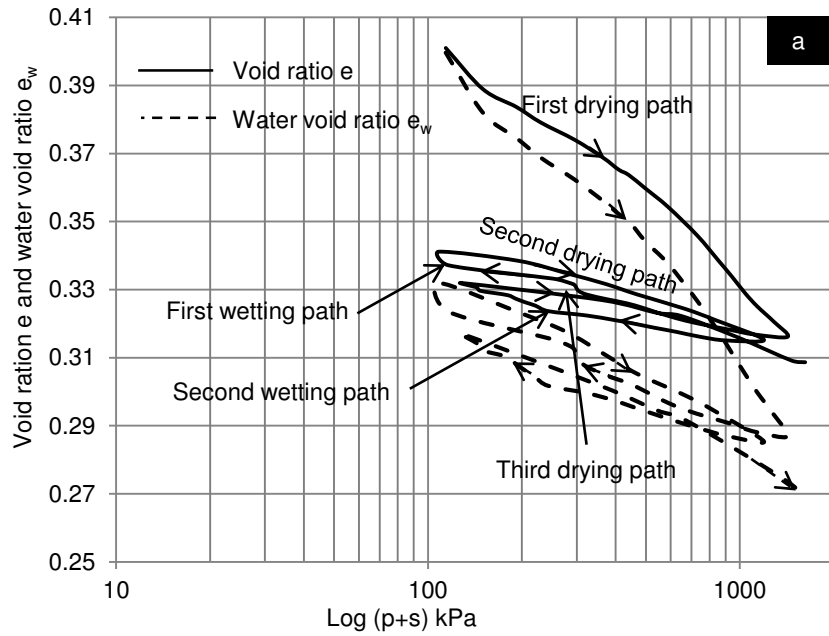


Figure 10 - Void ratio, degree of saturation suction relationship for Glacial till compacted at 13% water content (G3)

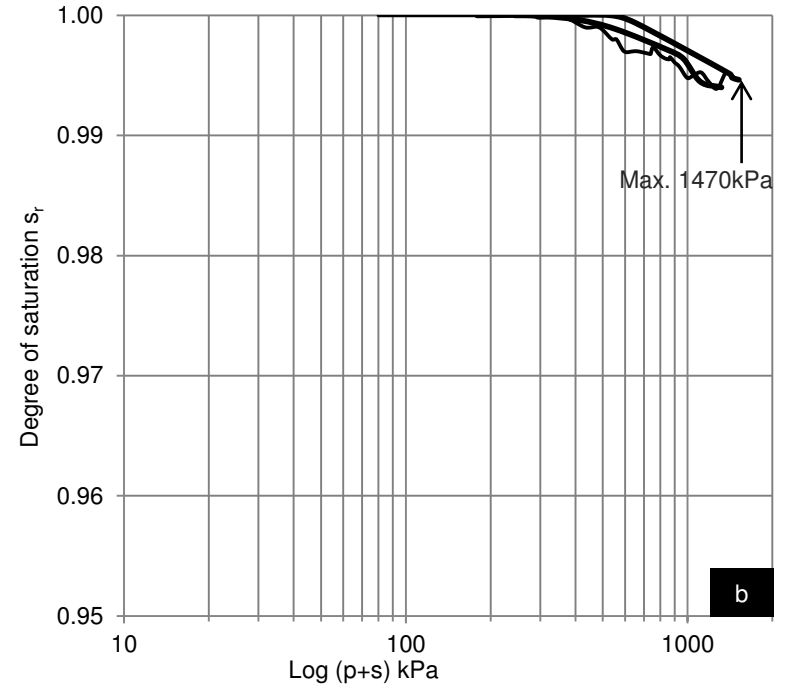
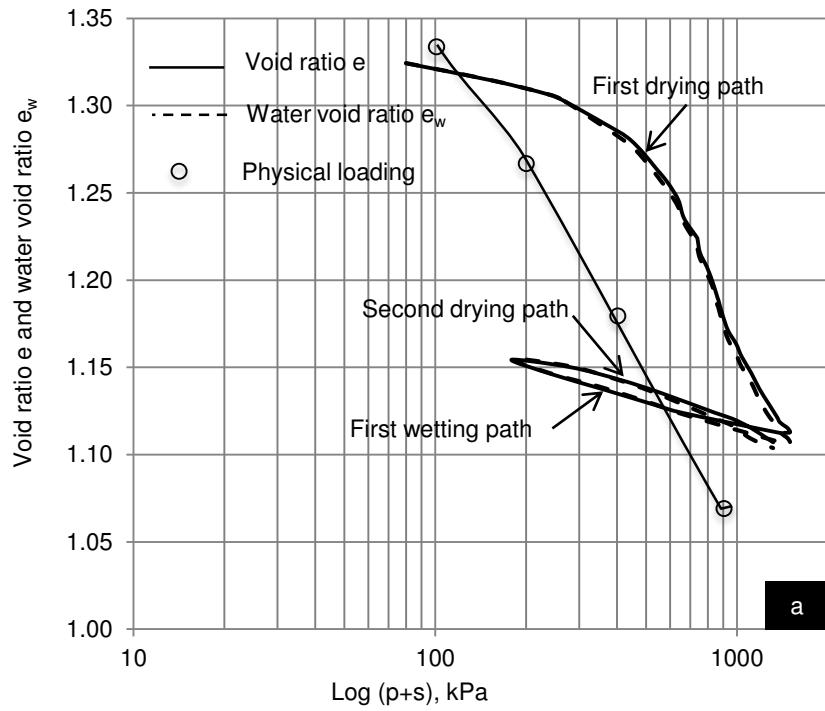


Figure 11 - Void ratio, water void ratio and degree of saturation vs suction for kaolin (K1)